

Tree state category identification for boreal area conifers using global features estimation by fuzzy logic approach

A S Pyataev^{1,2}, A Y Redkin², A V Pyataeva^{3,1}

¹Reshetnev Siberian State University of Science and Technology, Krasnoyarsky Rabochy Av 31, Krasnoyarsk, Russia, 660037

²Branch of FBI «Russian Centre of Forest Health» – «Centre of Forest Health of Krasnoyarsk Krai», Akademgorodok 50A building 2, Krasnoyarsk, Russia, 660036

³Siberian Federal University, Svobodny pr. 79 Krasnoyarsk, Russia, 660041

Abstract. Tree state category identification allows forecasting forest development in the surveyed area. Tree state category determination process based on global features is subjective, so its automation will remove this drawback and improve inspections quality. For global features estimation, fuzzy logic is used. The spline-approximation of the membership functions of fuzzy sets is made by Gaussian functions. Such an approach in conjunction with image processing algorithms that allows to search objects on images or correct images obtained for example from unmanned aerial vehicles could be the basis of a system for automatically determining the forest plantations health state. The study was conducted for coniferous species of the boreal zone.

1. Introduction

Determining the tree state category by a set of visual marks is widely used in forest health diagnostics to estimate sanitary conditions of forest plantations. This estimation based on forest health diagnostics results allows to planning forest protection events system, which contains preventive, protective and exterminatory actions. Tree sanitary condition estimation correctness depends on forest health engineer experience and qualification. Forest health engineer such estimation made uses subjective concepts such as crown density, conifer shades, defoliation grade, etc. Tree state category division based on symptom analyses, which could be separated by local and global. The presence of hollows, conifer damage, burns, etc. could be classified as local symptoms. At the same time, crown density, conifer shades, growth size, defoliation grade, shrinking branches grade and bark falling could be classified as global symptoms. Global symptoms description subjectiveness generates difficulties and dissensions when tree state categories are being estimated. Global symptoms determination approach based on fuzzy logic designed to fix this problem. Such an approach in conjunction with image processing algorithms that allows to search objects on images [1,2] or correct images [3] obtained for example from unmanned aerial vehicles could be the basis of a system for automatically determining the forest plantations health state.

2. Theoretical research

In paper [4] were extracted linguistic variables and terms, shown in table 1, to formalize subjective concepts of global symptoms determination. Term domain and definition are built in cooperation with Krasnoyarsk centre of forest health specialists.

Table 1. Linguistic variables and its terms.	
Linguistic variable	Terms
crown density	rich, sparse, openwork, very openwork
growth	normal, reduced, small, very small or nonexistent
shrinking branches grade	nonexistent, dry unitary branches, crown drying out less than 2/3 volume, crown drying out more than 2/3 volume
bark falling	nonexistent, partial, full
conifer shade	green, light green, yellow green, flavescent, yellow, red-brown, gray

The characteristic functions, describes terms, were piecewise linear (figure 1) and specified in tabular form. Such form of function description makes it difficult to automate calculations. One of the problem solutions is to approximate piecewise linear functions by a smooth function.

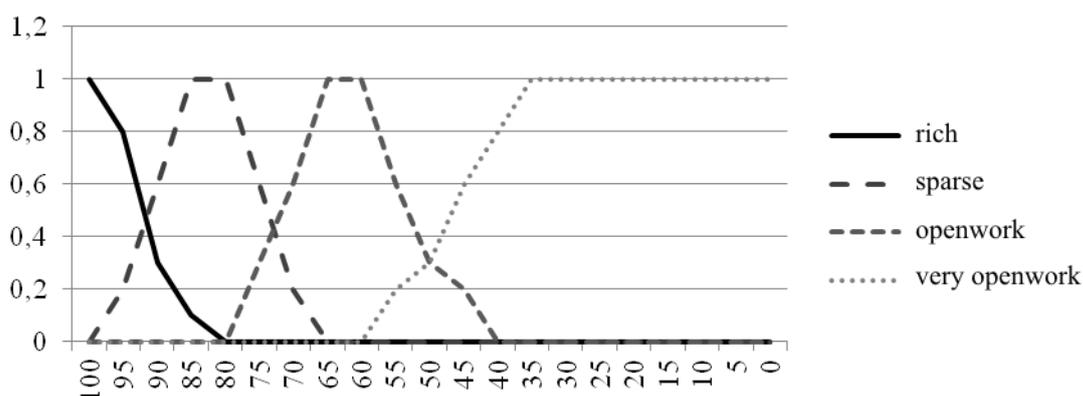


Figure 1. The linguistic variable «crown density» terms graphics.

Approximation methods are actively used in different fields of study to solve various problems. In paper [5] derived a new finite dimensional semidiscrete approximation scheme for systems of linear neutral delay-differential equations and proved convergence results. Paper [6] considers a fuzzy data approximation method defined at a 3D fuzzy data set. A fuzzy smoothing bicubic spline approximation for a given fuzzy data set is defined and the approximation error using similarity measures of fuzzy numbers is estimated. Study [7] considers the use of the convolution method for constructing approximations comprising fuzzy number sequences with useful properties for a general fuzzy number. It shows that this convolution method can generate differentiable approximations in finite steps for fuzzy numbers with finite non-differentiable points. Paper [8] considers a smoothing method of a set of points to be approximated from a given boundary value problem for the modified Helmholtz equation. In paper [9] the context interpolation algorithms for multidimensional signals in the compression problem are investigated. Interpolation algorithm based on context modeling for the hierarchical compression method for arbitrary dimension signals is proposed. The algorithm is based on optimizing parameters of the interpolating function in a local neighborhood of the interpolated sample. Wherein locally optimal parameters, which, were found for more sparse scale signal levels, are used to interpolate samples of less sparse scale signal levels.

In our paper, we carried out a spline approximation of previously corrected characteristic functions with Gauss functions. The original piecewise linear functions were presented in tabular form. The aim

of the approximation made was to find functions that are as close as possible to the original piecewise linear functions, wherein the functions obtained should keep classification quality.

The approximation functions received could be used not only for pine, but for every boreal coniferous species. Gauss function spline approximation result for linguistic variable «crown density» terms graphics shown in table 2.

Table 2. Linguistic variable «crown density» characteristic functions	
Term	Characteristic functions
Rich	$f(x) = \begin{cases} 1/\exp\left[(x - 97)^2 / 32\right], & x \leq 97 \\ 1, & x > 97 \end{cases}$
Sparse	$f(x) = \begin{cases} 1/\exp\left[(x - 82)^2 / 50\right], & x \leq 82 \\ 1, & x \in (82, 87) \\ 1/\exp\left[(x - 87)^2 / 32\right], & x \geq 87 \end{cases}$
Openwork	$f(x) = \begin{cases} 1/\exp\left[(x - 55)^2 / 50\right], & x \leq 55 \\ 1, & x \in (55, 70) \\ 1/\exp\left[(x - 70)^2 / 50\right], & x \geq 70 \end{cases}$
Very openwork	$f(x) = \begin{cases} 1, & x < 40 \\ 1/\exp\left[(x - 40)^2 / 50\right], & x \geq 40 \end{cases}$

Figure 2 considers approximated graphics for each term. X-axis contains crown density percent and Y-axis describes assurance degree.

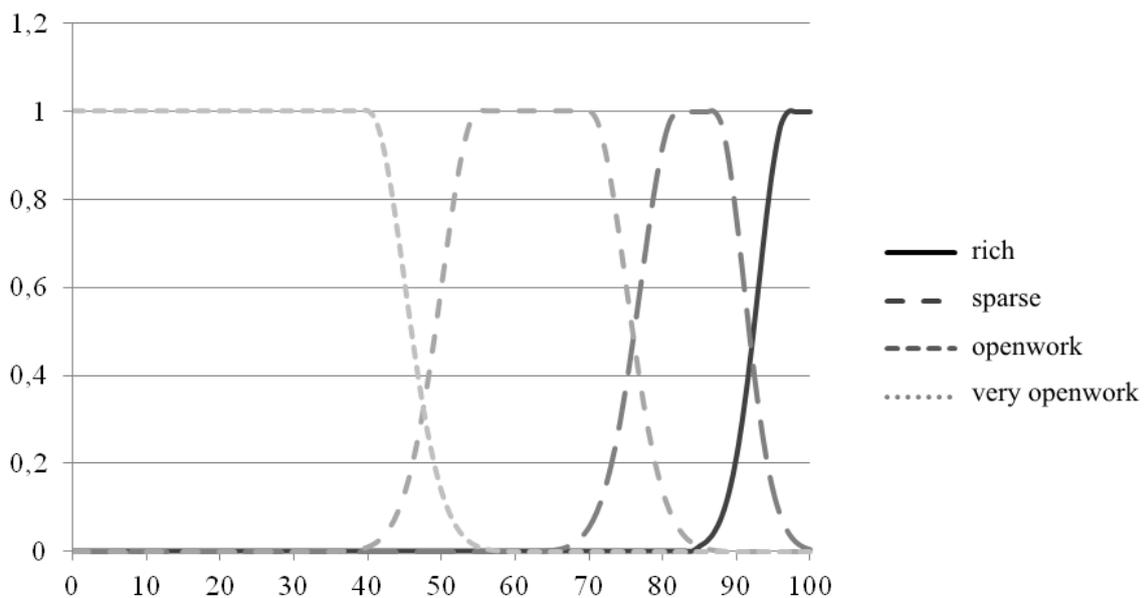


Figure 2. The linguistic variable «crown density» approximated terms graphics.

Characteristic functions approximation made similarly for the rest of linguistic variables. Figure 3 shows previously corrected piecewise linear terms graphics and approximated terms graphics:

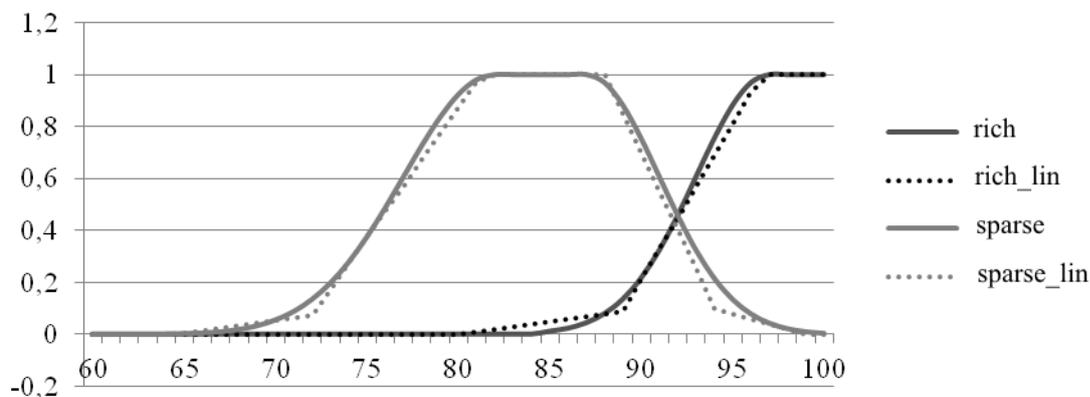


Figure 3. Comparison of the piecewise linear and approximated graphics for terms.

Fuzzy rules knowledgebase has been produced on linguistic variables characteristic functions. Fuzzy rules examples that allow making a conclusion about the state category of the surveyed tree are given below:

- IF («crown density» = «rich») AND («growth» = «normal») AND («shrinking branches grade» = «0») THEN («state» = «healthy»).
- IF («crown density» = «openwork») AND («growth» = «small») AND («shrinking branches grade» = «from 10% to 65%») THEN («state» = «severely weakened»).

According to the approximation results, there was no significant change neither in the clear output value, nor the degree of confidence in the introduction of fuzziness, nor the triggering force of the rules, nor the type of output figure. The reason for this was similarity of the approximating functions and the original piecewise linear functions, so the quality of the fuzzy classification has not been changed.

3. Conclusion

In this paper, a mathematical model is constructed allows describing subjective concepts that influence on the formation of a conclusion about the tree sanitary condition. A spline approximation of the initial characteristic piecewise linear functions by Gauss functions was performed to solve the problem of estimating the category of the coniferous trees of the boreal zone according to global features based on fuzzy logic. The mathematical model built in this work allows reducing the cost of automation of calculations related to the processing of the data obtained by forest pathological surveys, despite the fact that the accuracy value of fuzzy classification after the approximation of the membership functions remained at the same level.

References

- [1] Zakharov A A, Barinov A E, Zhiznyakov A L and Titov V S 2018 Object detection in images with a structural descriptor based on graphs *Computer optics* **42** № 2 pp 283–290.
- [2] Vizilter U V, Gorbatshevich V S, Vishnyakov B V and Sidyakin S V 2017 Object detection in images using morphlet descriptions *Computer optics* **41** № 3 pp 406–411.
- [3] Kozak A V, Steinberg B Y and Steinberg O B 2018 Fast restoration of a blurred image obtained by a horizontally rotating camera *Computer optics* **42** № 6 pp 1046–1053.
- [4] Pyataev A 2018 Tree state category identification for pine based on fuzzy logic by visual data *Proc. Int. Conf. Regional problems of earth remote sensing (Krasnoyarsk)* pp 184–187.

- [5] Fabiano R H and Catherine Payne 2018 Spline approximation for systems of linear neutral delay-differential equations *Applied Mathematics and Computation* **338** pp 789–808.
- [6] Gonzalez P, Idais H, Pasadas M and Yasin M 2018 3D fuzzy data approximation by fuzzy smoothing bicubic splines *Mathematics and Computers in Simulation* In Press, available online. – Access mode: <https://www.sciencedirect.com/science/article/abs/pii/S0378475418302751?via%3Dihub> (03.02.2019)
- [7] Huang H, Congxin W, Jialian X and Dongxiao Z 2017 Approximation of fuzzy numbers using the convolution method *Fuzzy Sets and Systems* **310** pp 14–46.
- [8] Kouibia A, Pasadas M, Reyah L and Akhrif R 2019 Approximation of surfaces by modified Helmholtz splines *Journal of Computational and Applied Mathematics* **350** pp 262–273.
- [9] Gashnikov M V 2018 Interpolation based on context modeling for hierarchical compression of multidimensional signals *Computer optics* **42** № 3. pp 468–475.